

Order no.: 011315

Mobile assembly platform

Platform height [mm]

970



Specification

| | | | | |
|---------------------------|------------------------------|---|--|---------------------------|
| Working height 2.97 m | Scaffolding length 1.3 m | Scaffolding width 675 mm | Scaffolding height 1.13 m | Platform width 600 mm |
| Platform length 1.25 m | Max. load capacity 200 kg | Transport dimensions (plus packaging) 1250 x 600 x 800 mm, 17.5 kg | Business division MUNK Günzburger Steigtechnik | Platform height 970 mm |

Facts

- Mobile scaffolding made of sturdy round aluminium tubing with welded frame parts
- Roll it in. Lock it in place. Get to work. – Set up in minutes without tools
- Basic module (item 11315): Assembly platform with two railings, two clip-on frames and swivel castors
- Modular expandability: The assembly platform can be freely configured using standard scaffolding components – in widths of 1,350 mm and lengths of 1,800 / 2,450 / 3,000 mm.
- Platform can be attached to any rung

Description

Want to work quickly and safely at height? This assembly platform is ready to use in just a few minutes. Roll it through doors, lock the brakes – done. Climb aboard safely via the convenient ladder access. Stand securely on the non-slip platform, with the surrounding railing protecting you when working overhead. Tools are within easy reach, reducing travel time and set-up time. For electrical, maintenance, painting and finishing jobs throughout the building: compact, manoeuvrable, stable – so you can get more done and deliver clean results at the end of the day.

- Minimal installation effort – ideal for assembly, maintenance and removal
- Safe ascent via ladder access with comfortable incline
- Space-saving during transport and storage, as it can be used as a trolley when folded up
- Four swivel castors, Ø 125 mm, with brakes and spindles for height adjustment
- Slip-resistant platform for secure standing
- Step ladder (item 11316) can be attached without tools for quick, safe ascent with plug-in exit rail (optional)
- Railing set, single-sided (item 11318) for targeted side protection on the platform (optional)
- Three-sided railing set (item 11319) for all-round protection (optional)

Scope of supply


| | |
|----------------------|-----------------------|
| ■ Platform: 1 x | ■ Garde-corps: 2 x |
| ■ Swivel castor: 4 x | ■ Push-fit frame: 2 x |

Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems

- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures

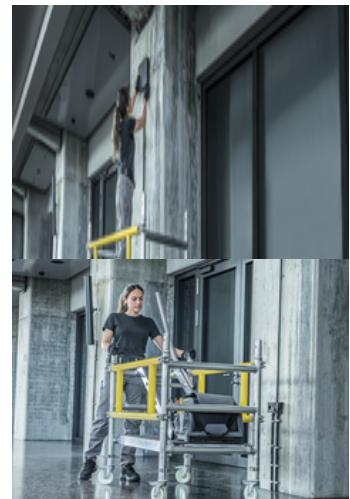

Added value

Safety at heights

- Optional protective assembly railing as safety railing during installation and removal
- Installation without the need of tools, uncomplicated and easy to handle
- Railing with integrated knee board and aluminium toe boards



Highest quality

- User-friendly and robust design
- Low weight of the individual parts for easy handling
- Welded round tube frames for maximum stability
- All-round profiled rungs for safe ascent and descent



Sturdy connection

- Automatically closing scaffolding claw with sophisticated geometry for a secure connection
- Innovative spring clip for plug-on frame – no accidental loosening or losing possible
- Transverse and diagonal braces for high stability



Modular kit system

- More than 180 variants are possible by combining different individual parts
- Flexible adaptations and extensions possible at any time
- Individual parts at the original part price
- Installation and removal without tools



Safe standing

- Adjustable outriggers with swing base or chassis bar ensure safe working depending on model
- Easy to handle
- Additional ballast weights required depending on application



Everything at a glance

- Clip tray for clearly visible attachment of the necessary test documents to the scaffolding
- Weather and UV-resistant



Flexible basis

- Swivel castors with load centring in braked condition
- Height adjustment for level compensation
- Various sizes and designs



Corporate certifications

Standards for quality and sustainability



Management System
ISO 9001:2015
ISO 14001:2015
www.tuv.com
ID: 9108612548



Nachhaltigkeit
EcoVadis
sustainable supply management
CSR-Rating in Silber 2022

