



Order no.: 681200

Stationary de-icing system, complete

platform length

15960

Specification

Platform length	Platform width	Platform height 3 m	Height	Total width
15.96 m	850 mm		4.1 m	950 mm
Railing height 1.1 m	Transport dimensions 15960 x 860 x 4100 mm, 800 kg	Business division MUNK Günzburger Steigtechnik	Order no. 681200	

Facts

- For the safe and quick removal of ice and snow loads from trucks and commercial vehicles. Also ideal for repairs to truck tarpaulins and superstructures.
- Maintenance-free design made of corrosionresistant aluminium profiles and stainless steel connecting parts for stationary installation
- Individual total lengths and configurations possible thanks to efficient modular design
- Step and platform surfaces made of non-slip steel grating (R12) for all weather conditions.
 The hole pattern also prevents the accumulation of dirt, snow and water



- Convenient access to the walkway via 45° stairway with handrails on both sides and automatically closing safety door
- Railings on both sides with foot and knee boards ensure a high level of safety at work (height: 1,100 mm)
- Easy installation thanks to delivery in preassembled modules including assembly instructions
- The design takes account of DIN EN ISO 14122-2 and -3
- Maximum load: 1.5 kN/m2, step load 150 kg, total load 300 kg
- Production in compliance with European standards DIN EN ISO 14122 and DIN EN 1004
- This product is made to order and cannot be returned

Scope of supply

Installation material: 1 x

Assembly instructions: 1 x

Information on sustainability criteria

Corporate certification: ISO 9001

Corporate certification: ISO 14001

Corporate certification: EN 1090


Corporate certification: EcoVadis

- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany



- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures

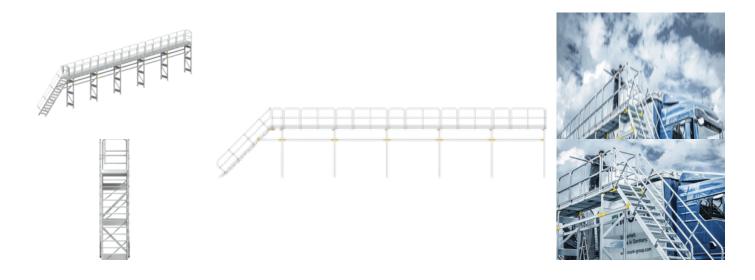



Added value

Product configurator

Configuring, enquiring about and ordering individual products could not be easier with our product configurator for stairs, bridging steps and mobile platform stairs. Simply enter your required dimensions and versions step by step, and a rotating 3D model will appear in real time. To save your configuration and request a quotation requires a login which will be set up for you by our Sales team.

Modular kit system

- Individually and cost-efficiently combinable for the respective requirement
- Platform heights from 1.25 to 3.0 m
- Three different platform lengths can be selected



Safety railing

- Railings and handrails on both sides ensure a high level of safety at work
- Fixed size or telescopic safety door



Ascent

- Non-slip designs for secure footing
- All kinds of different materials can be selected with non-slip classes from R 9 to R 13 – suitable for the specific application purpose





Modular walkway systems

- For a wide range of indoor applications in production, warehouses, as access to machines, as a walkway along building walls or as practical access for de-icing commercial vehicles in the winter months
- Thanks to innovative modular construction, walkway systems can be assembled conveniently, cost-effectively and yet precisely to meet individual requirements
- The platform height of the walkway systems can be individually determined between 1.25 and 3.0 metres. The desired total length is achieved by way of combining three different walkway lengths
- The modules can be easily assembled using pre-assembled modules, securely connected to one another and fastened to the underlying surface using foot brackets
- The maintenance-free modules are manufactured as a stable, corrosion-resistant aluminium construction with a supporting frame.
- Maximum load: 1.5 kN / m², step load 150 kg, total load 300 kg
- Access to the walkway conveniently via stairs 45° with handrails on both sides and automatically closing safety door.
- The delivery from the factory is made in preassembled modules for quick and simple assembly in accordance with the enclosed assembly instructions

Note

When assembling a walkway, only modules with the same platform height can be combined. Please contact us if you need different platform heights on a walkway system. This also applies if you need walkway systems for outdoor use, as they are primarily designed for indoor use (with the exception of de-icing systems).



Corporate certifications

Standards for quality and sustainability









