

Order no.: 127133
FlexxLift 5.0 SD



Specification

Working height 5 m	Platform length 1.11 m	Platform width 765 mm	Approved for outdoor use No	Max. load capacity 240 kg
Platform height max. 3 m	Inclination 0 °	Transport dimensions (plus packaging) 1273 x 765 x 1776 mm, 460 kg	Order no. 127133	

Facts

- Self-propelled vertical scissor lift, working height 5.00 m
- Max. load capacity 240 kg – large platform (1.11 x 0.63 m)
- Battery-powered drive and lifting system – self-propelled and emission-free
- Operated via a central joystick – suitable for both right- and left-handed users
- 24 V battery technology with integrated charger, operating hours counter and charge level indicator

Description

Large working area, heavy load – and no pushing required. The FlexxLift 5.0 SD self-propelled vertical scissor lift raises and moves a 240 kg load to a working height of 5.00 m using a joystick. You control it; the lift does the work.

Self-propulsion and lifting via joystick

Both travel and lifting are battery-powered and emission-free – you operate both via the central joystick, which is equally comfortable for right- and left-handers. Instead of pushing the heavy platform, you simply drive it to the required position and lift yourself to the required height. This means you don't waste any time between two work sites.

- Emergency discharge and detachable drive unit – can be moved at any time, even when the battery is flat
- Base width 631 mm, net weight 460 kg – fits through standard doorways, suitable for vans and lifts
- Forklift pockets and lifting eyes
- Tested in accordance with EN 280 (Class 1A), CE conformity and test report

Maximum stability thanks to the scissor mechanism

The hydraulic scissor mechanism guides the large platform vertically and evenly during lifting – ensuring the platform remains stable and secure at the top. This means you stand firmly at full working height and can concentrate on the task at hand rather than on the platform.

Plenty of space, high load capacity

The platform measures 1.11 x 0.63 m and has a load capacity of 240 kg – enough space for one person plus tools and materials. You can work at the top without having to compromise on payload.

Reliable power, always mobile

The maintenance-free 24 V system is charged via the integrated charger. The operating hours counter and charge level indicator keep you informed at all times. If the battery runs flat, the emergency lowering mechanism and disconnectable drive system keep the platform mobile, so you can still move it out of the way.

Open platform – loaded from the side, without having to reach over the edge

With the open platform, you can load and unload your materials conveniently from the side, rather than having to lift them over a high edge. This means you can reach items at the bottom with ease.

Easy to transport – through doors, into vans and lifts

With a transport width of 631 mm, you can wheel the platform through standard doors and into standard vans. Use the forklift pockets and crane eyes for transport. Check the platform's own weight of 460 kg against your lift's load capacity beforehand.


Tested safety – with certification

The stage has been tested in accordance with EN 280 (Class 3A); the CE Declaration of Conformity and test report are available in German. A 12-month warranty applies. Request your quote now.

Scope of supply

- Lift: x
- Instructions for use and operation: x

More product pictures

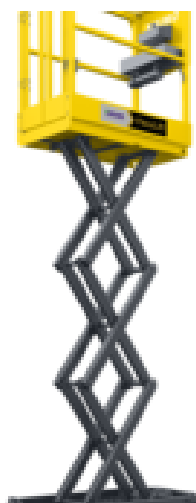

Corporate certifications

Standards for quality and sustainability

