



Order no.: 127130

FlexxLift 5.0 SP



Specification

Working height 2.15 - 5 m	Platform length 1.11 m	Platform width 631 mm	Base area length 1.11 m	Base area width 631 mm
Approved for outdoor use No	Max. load capacity 240 kg	Transport dimensions (plus packaging) 1273 x 770 x 1776 mm, 390 kg	Business division MUNK Günzburger Steigtechnik	Order no. 127130

Facts

- Vertical scissor lift with a working height of 5.00 m
- Battery-powered lifting drive, manually operated
- Agile and easy to manoeuvre
- Fits through standard doorways and is suitable for lifts thanks to its compact transport dimensions
- Suitable for delicate floors thanks to its low weight
- 24V battery system with integrated charger (CEE plug, 230 V)
- Battery level indicator

Description

If you need space and a high load capacity at height, a single-ladder platform isn't the right choice. The FlexxLift 5.0 SP vertical scissor lift can carry 240 kg on a large platform up to a working height of 5.00 m. It lifts electrically and is manoeuvred manually.

Plenty of space, high load capacity

The platform measures 1.11 x 0.63 m – enough space for one person plus tools and materials. The hydraulic scissor mechanism lifts quickly and safely and supports up to 240 kg. You can work at height without having to compromise on tools or payload.

- Open work basket with horizontal knee rail
- Maximum load capacity: 240 kg (1 person + equipment)
- Forklift pockets and lifting eyes
- Tested in accordance with EN 280 (Class 3A)

Maximum stability thanks to the scissor mechanism

The scissor mechanism guides the platform vertically and evenly during lifting – giving the platform a stable, firm footing at the top. This means you stand securely at full working height and can concentrate on the task at hand rather than on the platform.

Electric lifting, manoeuvrable movement – excellent value for money

Lifting is controlled electrically via the joystick. To move the platform, you push the lightweight platform yourself. This combination of electric lifting and manual movement makes the SP particularly manoeuvrable in confined spaces and offers excellent value for money, as you get the convenience of electric lifting without the need for an expensive drive system.

Battery level at a glance

The maintenance-free 24 V system is charged via the integrated charger, and the battery level indicator shows you exactly where you stand at all times.

Easy to transport – through doors, into vans and into lifts

With a transport width of 770 mm, you can wheel the platform through standard doors and into standard vans. Use the forklift pockets and lifting eyes for transport. Please check in advance that the platform's net weight of 390 kg does not exceed your lift's load capacity.


Tested safety – with certification

The platform is tested in accordance with EN 280 (Class 3A); you will receive the CE Declaration of Conformity and test report in German. A 12-month warranty applies. Request your quote now.

Scope of supply

- Lift: 1 x
- Instructions for use and operation: 1 x

More product pictures

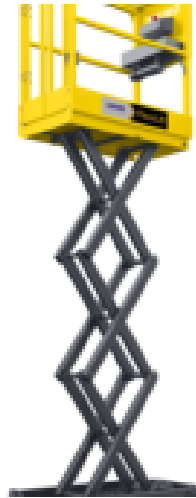

Corporate certifications

Standards for quality and sustainability

