


Order no.: 930609

## Hinge

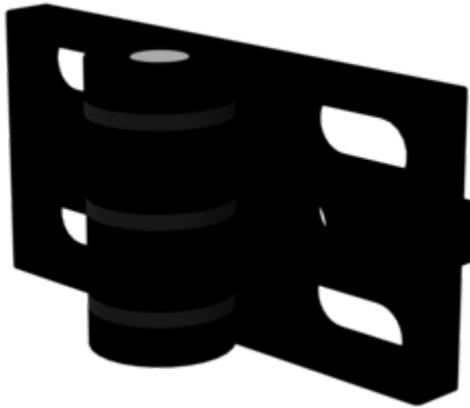

### Specification

Material Zinkdruckguss	Weight/piece 300 g	Dimension A 80 mm	Dimension B 40 mm	Dimension C 4.5 mm
Business division MUNK Profiltechnik	Order no. 930609			

### Facts

- Black powder-coated hinge
- Bright axle
- Black discs
- Note: The hinges can be adjusted horizontally and can therefore be perfectly aligned

### Description

Precisely adjustable hinges for optimal alignment! The MUNK Profiltechnik hinge made of durable zinc die-cast allows stepless horizontal adjustment and ensures permanently reliable connections for doors, flaps, and movable components.

#### High-Quality Construction for Continuous Use

- Zinc die-cast body: Sturdy 300 g construction with black powder coating for corrosion protection and an appealing appearance
- Precision bearing: Plain axle with black washers for smooth, long-lasting movement
- Compact dimensions: 80×40×4.5 mm – ideal for profile constructions without protrusion

### Adjustable Installation for Perfect Alignment

Horizontal adjustability: The hinge can be fine-tuned horizontally after installation – ideal for precisely aligning doors and flaps without time-consuming disassembly. Perfect fit: Compensates for assembly tolerances and allows post-installation fine adjustment for perfect closing behaviour.

### Versatile Application Possibilities

Specially developed for MUNK profile constructions – from lightweight maintenance hatches to robust access doors on enclosures and control cabinets. The adjustable design enables professional solutions even in complex installation situations.

### Typical Applications

- Machine enclosures: Adjustable doors and service flaps for precise closing
- Control cabinet technology: Professional door solutions with post-installation adjustability
- Testing equipment: Movable protective covers and access panels
- Workstations: Foldable workstation elements and storage solutions
- Safety systems: Reliable door connections for protective and barrier systems

Discover the MUNK hinge – the adjustable connection for movable components, aligned perfectly today and working reliably tomorrow.

### Scope of supply

- Hinge: 1 x


### Information on sustainability criteria

- Corporate certification: ISO 9001

- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---



## Corporate certifications

---

### Standards for quality and sustainability



Management System  
ISO 9001:2015  
ISO 14001:2015  
[www.tuv.com](http://www.tuv.com)  
ID 9108612548



**Nachhaltigkeit**  
**EcoVadis**  
sustainable supply management  
CSR-Rating in Silber 2022

