



Order no.: 042103

# Single-sided stepladder with clip-step relax



Number of steps

3	4	5	6	7	8	9	10	12
14								

# Specification

Working height	Step design	Number of steps/rungs	Platform included as step	Step depth
2.7 m	Steps	3 steps	Yes	80 mm
Step/Rung distance	Type of non-slip protection clip-step relax	Height	Platform height	Base spread
235 mm		1.34 m	670 mm	700 mm
Inclination 70 °	Lower outer width 470 mm	Depth of side-rails 73 mm	Depth of side-rails, support 58 mm	Width of side-rails 25 mm
Max. load capacity 150 kg	Design type Freestanding   Single-sided access	Transport dimensions 1434 x 461 x 164 mm, 5.91 kg	Business division MUNK Günzburger Steigtechnik	Order no. 042103

## **Facts**

- Stepladder made of aluminium
- Stable rectangular tube side-rails
- 80 mm deep grooved steps and large platform
- 4-fold edged step-to-side-rail connection
- Conical side-rail guide for safe stance



- nivello® ladder shoes with patented 2-axis inclination technology
- ergo-pad® grip area with clamping mechanism
- 'safe-cap' ladder joint
- clip-step relax step paddings for comfortable working
- Practical storage tray with integrated hooks and tool holders
- From seven steps or more: Spreader lock with two high-strength polyester straps

Step spacing: 235 mmLadder inclination: 70°Maximum load: 150 kg

## Scope of supply

Ladder: 1 x

### Information on sustainability criteria

Corporate certification: ISO 9001

Corporate certification: ISO 14001

Corporate certification: EN 1090

Corporate certification: EcoVadis

- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.



- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures







#### Added value

#### Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



#### Ladder joint safe-cap

- Smooth ladder joint with large contact surface and sturdy plastic protective cap
- The 6 rivets and thicker wall thickness provide for greater stability and protection at this sensitive point on the ladder, increasing its service life
- The safe-cap protects the ladder when in use, when loading and storing, as well as the contact surfaces, walls, truck loading areas and the joint itself



#### Storage tray

- For the practical storage of small parts
- Made from high-quality plastic
- Partly with integrated hooks and tool holders
- Different versions, depending on the ladder model



The movable ladder shoe sets new standards in stability






relax step® step padding

Greater comfort during prolonged periods of working on the ladder

- Worked into the leading edge of the step
- Pads the front edge of the ladder step
- Comfortable cushioning for leaning and bracing against the next step



Note: Working heights

- National regulations (e.g. TRBS 2121 Part 2 in Germany) must be complied with with regard to the maximum working height when using the ladder as a workstation.
- Information on <u>TRBS 2121 Part 2</u> has been summarised on our Service page
- Read our <u>tips and tricks</u> on how to calculate <u>working height</u>




ergo-pad® grip area

For easier and more ergonomic handling at the optimum carrying point





## Certificates

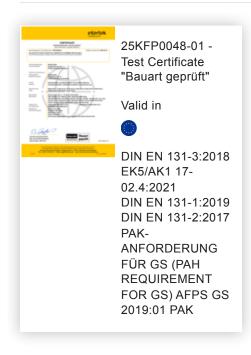



# Corporate certifications

## Standards for quality and sustainability









