



Order no.: 042216

Double-sided stepladder with clip-step relax



Number of steps

| 2x3 | 2x4 | 2x5 | 2x6 | 2x7 | 2x8 | 2x9 | 2x10 |
|------|-----|-----|-----|-----|-----|-----|------|
| 2x12 | | | | | | | |
| 2x14 | | | | | | | |

Specification

| Working height 3.4 m | Step design Steps | Number of steps/rungs 2x 8 steps | Step depth 80 mm | Step/Rung distance 235 mm |
|------------------------------------------------------|------------------------------|-------------------------------------|------------------------------------------------------|-----------------------------------------------------------|
| Type of non-slip protection clip-step relax | Height 1.85 m | Base spread 1.54 m | Inclination 70 ° | Lower outer width 580 mm |
| Depth of side-rails 73 mm | Width of side-rails 25 mm | Max. load capacity 150 kg | Design type Freestanding Double-sided access | Transport dimensions 1990 x 575 x 213 mm, 15.244 kg |
| Business division MUNK Günzburger Steigtechnik | Order no. 042216 | | | |

Facts

- Stepladder made of aluminium
- Stable rectangular tube side-rails
- Grooved steps with a depth of 80 mm
- clip-step relax step paddings for comfortable working
- 4-fold edged step-to-side-rail connection



- Conical side-rail guide for safe stance
- nivello® ladder shoes with patented 2-axis inclination technology
- ergo-pad® grip area with clamping mechanism
- From seven steps or more: Spreader lock with two high-strength polyester straps

Step spacing: 235 mmLadder inclination: 70°Maximum load: 150 kg

Scope of supply

Ladder: 1 x

Information on sustainability criteria

Corporate certification: ISO 9001

Corporate certification: ISO 14001

Corporate certification: EN 1090

Corporate certification: EcoVadis

- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard,
 small amounts of plastic
- No health hazards for the users



More product pictures









Added value

Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



The movable ladder shoe sets new standards in stability






relax step® step padding

Greater comfort during prolonged periods of working on the ladder

- Worked into the leading edge of the step
- Pads the front edge of the ladder step
- Comfortable cushioning for leaning and bracing against the next step



ergo-pad® grip area

For easier and more ergonomic handling at the optimum carrying point






Note: Working heights

- National regulations (e.g. TRBS 2121 Part 2 in Germany) must be complied with with regard to the maximum working height when using the ladder as a workstation.
- Information on <u>TRBS 2121 Part 2</u> has been summarised on our Service page
- Read our <u>tips and tricks</u> on how to calculate <u>working height</u>



Certificates

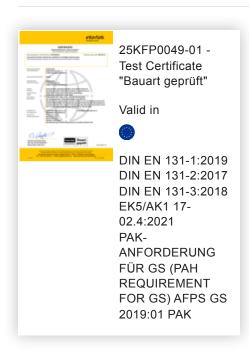



Corporate certifications

Standards for quality and sustainability









