



Order no.: 050087

# Platform ladder



### Number of steps

4 5	6	7	8	9	10
-----	---	---	---	---	----

# Specification

Working height	Step design	Number of steps/rungs	Platform included as step	Platform height
3.6 m	Steps	7 steps	Yes	1.6 m
Step depth	Step/Rung distance	Height	Base spread	Inclination 70 °
80 mm	235 mm	2.35 m	1.43 m	
Lower outer width 690 mm	Depth of side-rails 73 mm	Depth of side-rails, support 58 mm	Width of side-rails 25 mm	Max. load capacity 150 kg
Design type Freestanding   Single-sided access	Transport dimensions 2501 x 690 x 164 mm, 14 kg	Business division MUNK Günzburger Steigtechnik	Order no. 050087	

### **Facts**

- Platform ladder made of aluminium
- Stable rectangular tube side-rails
- Grooved steps with a depth of 80 mm
- Large, trapeze-shaped platform (400 / 360 x 425 mm)
- 4-fold edged step-to-side-rail connection



- Conical side-rail guide for safe stance
- Two handrails for safe ascent and descent (enclosed separately)
- 'safe-cap' ladder joint
- ergo-pad® grip area with clamping mechanism
- nivello® ladder shoes with patented 2-axis inclination technology
- Practical storage tray (350 x 200 mm)
- Spreader lock with two high-strength polyester straps

Step spacing: 235 mm
Ladder inclination: 70°
Maximum load: 150 kg

### Scope of supply

Ladder: 1 x

Handrail (enclosed separately): 2 x

Assembly instructions: 1 x

### Information on sustainability criteria

Corporate certification: ISO 9001

Corporate certification: ISO 14001

Corporate certification: EN 1090

Corporate certification: EcoVadis

- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany



- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

# More product pictures









#### Added value

#### Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



The movable ladder shoe sets new standards in stability





#### Ladder joint safe-cap

- Smooth ladder joint with large contact surface and sturdy plastic protective cap
- The 6 rivets and thicker wall thickness provide for greater stability and protection at this sensitive point on the ladder, increasing its service life
- The safe-cap protects the ladder when in use, when loading and storing, as well as the contact surfaces, walls, truck loading areas and the joint itself




#### ergo-pad® grip area

For easier and more ergonomic handling at the optimum carrying point





# Certificates

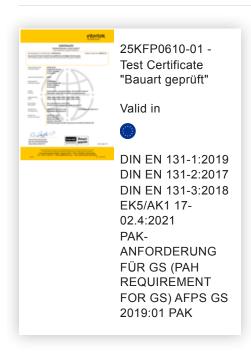



# Corporate certifications

### Standards for quality and sustainability









