MUNK
Sicherheit. Made in Germany.



Order no.: 115006

Hook ladder DIN EN 1147

Specification


Intended use Zugang	Ladder length 4.4 m	Clear width between rungs 250 mm	Outer width 300 mm	Ladder feet Leiterschuh
Depth of side-rails 60 mm	Width of side-rails 25 mm	Step/Rung height 28 mm	Step depth 29 mm	Number of steps/rungs 10 rungs
Step/Rung distance 335 mm	Max. load capacity 150 kg	Persons max. 1	Material Aluminium	Rung covering Standard (rot)
Transport dimensions (plus packaging) 4400 x 300 x 120 mm, 11 kg	Business division MUNK Rettungstechnik	Order no. 115006		

Facts

- Hook ladder made of aluminium
- Access ladder compliant with DIN EN 1147
- With heat-insulating, non-slip plastic coating
- Folding hook made of galvanised steel secured with locking pin
- Rubber feet as spacers

- 10 climbing rungs welded with side-rails, 3 hook rungs and 1 deck rung
- Corrosion-resistant fixtures made of galvanised steel
- Non-slip and replaceable ladder shoes
- Permissible load: 108 kg / 1 person

More product pictures

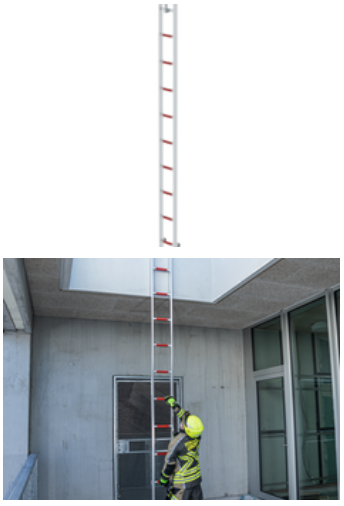



Certificates



17KFP0667-02 - Test Certificate "Bauart geprüft"

Valid in

DIN EN 1147:2010
DIN EN 1147 BEIBLATT (SUPPLEMENT) 1:2018
PAK-ANFORDERUNG FÜR GS (PAH REQUIREMENT FOR GS) AFPS GS 2019:01 PAK

MUNK
Sicherheit. Made in Germany.

Corporate certifications

Standards for quality and sustainability

Nachhaltigkeit
EcoVadis
sustainable supply management
CSR-Rating in Silber 2022