


Order no.: 071314

Loading bridge

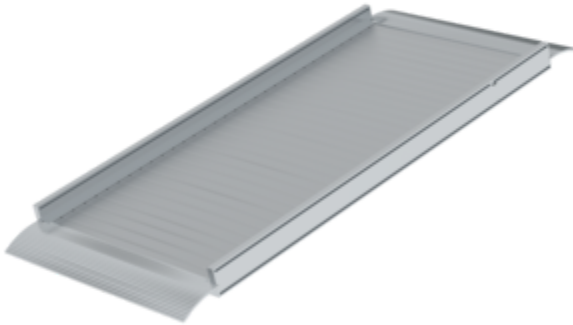

Specification

Length 1.92 m	Total length max. 1.92 m	Extendable No	Foldable No	Total width 850 mm
Clear width 800 mm	Bridgeable distance 1.4 m	Material Aluminium	Permissible total load 700 kg	Surface Aluminium geriffelt
Wheelchair accessible No	Transport dimensions (plus packaging) 1920 x 850 x 100 mm, 30 kg	Business division MUNK Günzburger Steigtechnik	Order no. 071314	

Facts

- Made of non-slip, grooved aluminium
- For easily and safely loading and unloading vehicles
- Curved approach angles
- With side toe boards
- Length: 1.92 m
- Load capacity: 700 kg


Scope of supply

- Loading bridge: 1 x
- Instructions for use and operation: 1 x

Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures



Corporate certifications

Standards for quality and sustainability

