


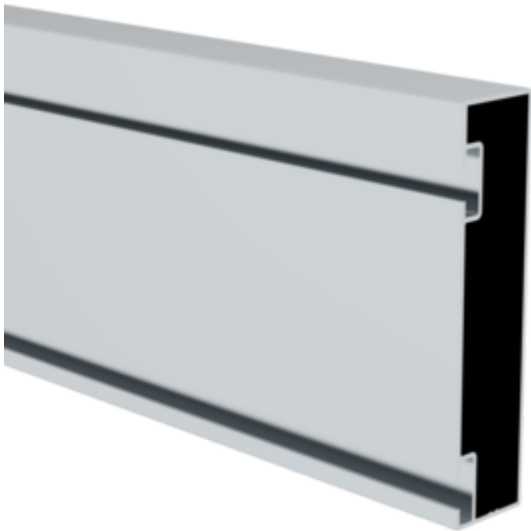

Order no.: 986063

Railing toe board 108x25

Model versions

Systemgeländer Fußleiste 108x25

Systemgeländer Fußleiste 110x10

Specification

Length 3.5 m	Transport dimensions (plus packaging) 3500 x 25 x 110 mm, 3.6 kg	Predecessor product 986062	Business division MUNK Günzburger Steigtechnik	Order no. 986063
-----------------	---	-------------------------------	--	---------------------


Facts

- Universal use
- Simple to assemble
- Stable design
- Attractive design
- A stainless steel design is also available at a surcharge, which is recommended for outdoor use. Surface treatment such as powder coating can be carried out in all conventional RAL colours on request.
- All connections are also available in stainless steel on request

Scope of supply

- Installation material: 1 x
- Assembly instructions: 1 x

More product pictures



Added value

Product configurator

Configuring, enquiring about and ordering individual products could not be easier with our [product configurator](#) for stairs, bridging steps and mobile platform stairs. Simply enter your required dimensions and versions step by step, and a rotating 3D model will appear in real time. To save your configuration and request a quotation requires a login which will be set up for you by our Sales team.



Safety railing

- Railings and handrails on both sides ensure a high level of safety at work
- Fixed size or telescopic safety door



Modular kit system

- Individually and cost-efficiently combinable for the respective requirement
- Platform heights from 1.25 to 3.0 m
- Three different platform lengths can be selected

Ascent

- Non-slip designs for secure footing
- All kinds of different materials can be selected with non-slip classes from R 9 to R 13 – suitable for the specific application purpose



Modular walkway systems

- For a wide range of indoor applications in production, warehouses, as access to machines, as a walkway along building walls or as practical access for de-icing commercial vehicles in the winter months
- Thanks to innovative modular construction, walkway systems can be assembled conveniently, cost-effectively and yet precisely to meet individual requirements
- The platform height of the walkway systems can be individually determined between 1.25 and 3.0 metres. The desired total length is achieved by way of combining three different walkway lengths
- The modules can be easily assembled using pre-assembled modules, securely connected to one another and fastened to the underlying surface using foot brackets
- The maintenance-free modules are manufactured as a stable, corrosion-resistant aluminium construction with a supporting frame.
- Maximum load: 1.5 kN / m², step load 150 kg, total load 300 kg
- Access to the walkway conveniently via stairs 45° with handrails on both sides and automatically closing safety door.
- The delivery from the factory is made in pre-assembled modules for quick and simple assembly in accordance with the enclosed assembly instructions

Note

When assembling a walkway, only modules with the same platform height can be combined. Please contact us if you need different platform heights on a walkway system. This also applies if you need walkway systems for outdoor use, as they are primarily designed for indoor use (with the exception of de-icing systems).

Corporate certifications

Standards for quality and sustainability

