


Order no.: 077536

Rail fastener for ladder rungs

Material

Galvanised steel

Stainless steel

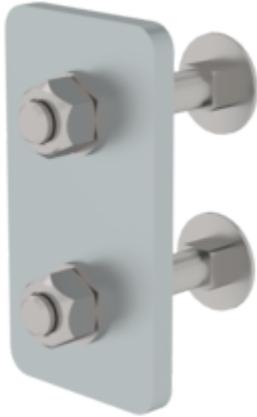

Specification

| | | | |
|----------------------------|---|--|---------------------|
| Material Stahl verzinkt | Transport dimensions (plus packaging) 75 x 40 x 24 mm, 0.18 kg | Business division MUNK Günzburger Steigtechnik | Order no. 077536 |
|----------------------------|---|--|---------------------|

Facts

- For attaching fall protection rails to vertical ladders
- Precisely manufactured brackets for a secure hold
- Secure attachment of the rails at a distance of 1.68 m
- Fastening of the fall protection rail to the ladder rungs at a distance of 1.68 m. With shorter ladder lengths, however, at least four attachment points

Scope of supply

- Rail fastener: 1 x
- Installation material: 1 x
- Assembly instructions: 1 x

Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures



Corporate certifications

Standards for quality and sustainability



Management System
ISO 9001:2015
ISO 14001:2015
www.tuv.com
ID 9108612548



Nachhaltigkeit
EcoVadis
sustainable supply management
CSR-Rating in Silber 2022

