



Order no.: 041645

# Double-sided stepladder with clip-step R13



### Number of steps

2x3	2x4	2x5	2x6	2x7	2x8	2x9	2x10
2x12							
2x14							

# Specification

Working height 4.3 m	Step design Steps	Number of steps/rungs 2x 12 steps	Step depth 80 mm	Step/Rung distance 235 mm
Type of non-slip protection clip-step R13	Height 2.79 m	Base spread 2.22 m	Inclination 70 °	Lower outer width 700 mm
Depth of side-rails 73 mm	Width of side-rails 25 mm	Max. load capacity 150 kg	Design type Freestanding   Double-sided access	Transport dimensions 2990 x 692 x 213 mm, 21.834 kg
Business division MUNK Günzburger Steigtechnik	Order no. 041645			

## **Facts**

- Stepladder made of aluminium
- Stable rectangular tube side-rails
- Grooved steps with a depth of 80 mm
- 4-fold edged step-to-side-rail connection
- clip-step R13 step padding for certified non-slip protection on all accessible steps



- Conical side-rail guide for safe stance
- nivello® ladder shoes with patented 2-axis inclination technology
- ergo-pad® grip area with clamping mechanism
- Sturdy, solid aluminium ladder joint, securely screwed in place
- Spreader lock with two high-strength polyester straps

Step spacing: 235 mm
Ladder inclination: 70°
Maximum load: 150 kg

## Scope of supply

Ladder: 1 x

## Information on sustainability criteria

Corporate certification: ISO 9001

Corporate certification: ISO 14001

Corporate certification: EN 1090

Corporate certification: EcoVadis

- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality



- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

# More product pictures





#### Added value

Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



The movable ladder shoe sets new standards in stability





clip-step R 13 step padding

Certified non-slip protection for step ladders

Fulfils the requirements of the highest possible

- Fulfils the requirements of the highest possible non-slip class R 13 thanks to aluminium oxide particles
- Improves work safety in wet and oilcontaminated environments
- Applied up to the maximum accessible step as a visual check
- Retrofittable, available as a spare part and also in yellow in selected lengths (RAL 1021)



ergo-pad® grip area

For easier and more ergonomic handling at the optimum carrying point






#### Note: Working heights

- National regulations (e.g. TRBS 2121 Part 2 in Germany) must be complied with with regard to the maximum working height when using the ladder as a workstation.
- Information on <u>TRBS 2121 Part 2</u> has been summarised on our Service page
- Read our <u>tips and tricks</u> on how to calculate <u>working height</u>



### Certificates

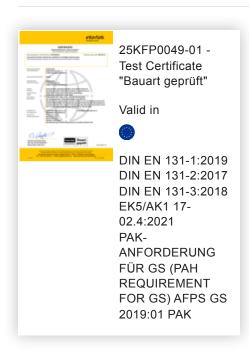



# Corporate certifications

## Standards for quality and sustainability









