



Order no.: 011227

# Single-sided ML stepladder



Number of steps

- 3
- 4
- 5
- 6
- 7

## Specification

|                                                      |                                                                            |                                                      |                                          |                              |
|------------------------------------------------------|----------------------------------------------------------------------------|------------------------------------------------------|------------------------------------------|------------------------------|
| Working height<br>3.65 m                             | Step design<br>Steps                                                       | Number of steps/rungs<br>7 steps                     | Platform included as<br>step<br>Yes      | Step depth<br>80 mm          |
| Step/Rung distance<br>235 mm                         | Type of non-slip<br>protection<br>Aluminium<br>corrugated                  | Height<br>2.25 m                                     | Platform height<br>1.63 m                | Base spread<br>1.31 m        |
| Inclination<br>70 °                                  | Lower outer width<br>580 mm                                                | Depth of side-rails<br>50 mm                         | Depth of side-rails,<br>support<br>35 mm | Max. load capacity<br>150 kg |
| Design type<br>Freestanding  <br>Single-sided access | Transport dimensions<br>(plus packaging)<br>2405 x 575 x 127<br>mm, 9.1 kg | Business division<br>MUNK Günzburger<br>Steigtechnik | Order no.<br>011227                      |                              |

## Facts

- Stepladder made of aluminium
- Ergonomically shaped ladder side-rails for easy handling
- 80 mm deep grooved steps and large platform
- High-strength bolted step-to-side-rail connection
- Conical side-rail guide for safe stance

- 4-fold riveted ladder joint made of aluminium
- Non-slip ladder shoes
- Practical storage tray
- From six steps or more: Spreader lock with two high-strength polyester straps
- Step spacing: 235 mm
- Ladder inclination: 70°
- Maximum load: 150 kg

### Scope of supply

- Ladder: 1 x

### Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures

---

## Added value

---

### Industrial grade

Stable and robust for tough everyday working life (including 4-way edging)


- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



### clip-step step padding

Optimised and certified non-slip protection for greater comfort and safety

- Made of grooved plastic
- Exact fit and easy to clip onto the steps
- Applied up to the maximum accessible step as a visual check
- Retrofittable and available as spare part



### Storage tray


- For the practical storage of small parts
- Made from high-quality plastic
- Partly with integrated hooks and tool holders
- Different versions, depending on the ladder model



### clip-step R 13 step padding

Certified non-slip protection for step ladders


- Fulfils the requirements of the highest possible non-slip class R 13 thanks to aluminium oxide particles
- Improves work safety in wet and oil-contaminated environments
- Applied up to the maximum accessible step as a visual check
- Retrofittable, available as a spare part and also in yellow in selected lengths (RAL 1021)



### relax step® step padding

Greater comfort during prolonged periods of working on the ladder

- Worked into the leading edge of the step
- Pads the front edge of the ladder step
- Comfortable cushioning for leaning and bracing against the next step




### Note: Working heights

- National regulations (e.g. TRBS 2121 Part 2 in Germany) must be complied with with regard to the maximum working height when using the ladder as a workstation.
- Information on [TRBS 2121 Part 2](#) has been summarised on our Service page
- Read our [tips and tricks](#) on how to calculate [working height](#)



## Certificates

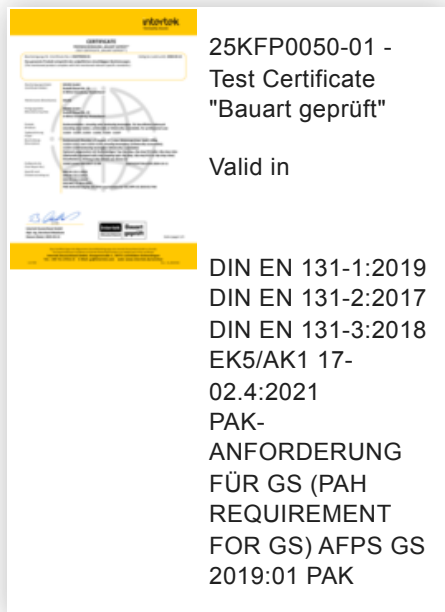

Corporate certifications

Standards for quality and sustainability

