

Order no.: 063270

Special wall bracket,  
adjustment range 500-  
600mm, galvanised steel



Wall clearance min [mm]

- 500
- 600
- 700
- 800

Specification

Wall distance 500 mm	Wall anchor Single	Wall distance min. 500 mm	Wall distance max. 600 mm	Adjustment range 100 mm
Material Galvanised steel	Transport dimensions (plus packaging) 510 x 200 x 200 mm, 10.5 kg	Business division MUNK Günzburger Steigtechnik	Order no. 063270	

Facts

- Available for wall clearances of 500–900 mm
- Good anchoring for different wall types
- Steel quality ensures a high load-bearing capacity
- 1 set comprising 1x right, 1x left

Scope of supply

- Wall anchor: 2 x


## Information on sustainability criteria

---

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

## More product pictures

---

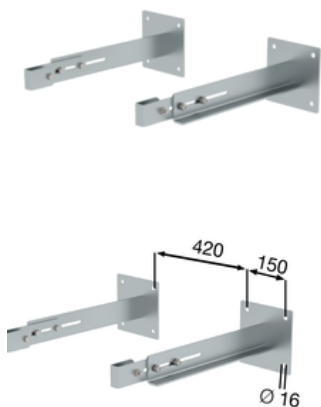

## Added value

---

### Optimum planning

- Practical planning aids (available as [Downloads](#)) with tips for correct planning of vertical ladder systems
- Planning in close coordination with the client as well as the place and purpose of use
- Joint project planning



# Corporate certifications

---

## Standards for quality and sustainability

