



Order no.: 043807

# Double-sided stepladder 250 kg with clip-step R13



Number of steps

- 2x3
- 2x4
- 2x5
- 2x6
- 2x7
- 2x8

## Specification

|                                                      |                                                 |                                     |                                                     |                                                                           |
|------------------------------------------------------|-------------------------------------------------|-------------------------------------|-----------------------------------------------------|---------------------------------------------------------------------------|
| Working height<br>3.15 m                             | Step design<br>Stufen                           | Number of steps/rungs<br>2x 7 steps | Platform included as<br>step<br>Ja                  | Step depth<br>80 mm                                                       |
| Step/Rung distance<br>235 mm                         | Type of non-slip<br>protection<br>clip-step R13 | Height<br>1.61 m                    | Inclination<br>70 °                                 | Lower outer width<br>550 mm                                               |
| Depth of side-rails<br>73 mm                         | Width of side-rails<br>25 mm                    | Max. load capacity<br>250 kg        | Design type<br>Freistehend  <br>Beidseitig begehbar | Transport dimensions<br>(plus packaging)<br>1740 x 548 x 200<br>mm, 12 kg |
| Business division<br>MUNK Günzburger<br>Steigtechnik | Order no.<br>043807                             |                                     |                                                     |                                                                           |

## Facts

- Stepladder made of aluminium
- Stable rectangular tube side-rails
- 80 mm deep steps and large platform
- clip-step R13 step padding for certified non-slip protection on all accessible steps
- 4-fold edged step-to-side-rail connection

- Conical side-rail guide for safe stance
- nivello® ladder shoes with patented 2-axis inclination technology
- ergo-pad® grip area with clamping mechanism
- Sturdy, solid aluminium ladder joint, securely screwed in place
- Spreader lock with two high-strength polyester straps
- Step spacing: 235 mm
- Ladder inclination: 70°
- Maximum load: 250 kg

### Scope of supply

- Ladder: 1 x

### Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality

- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

### More product pictures



## Added value

---

### Industrial grade

Stable and robust for tough everyday working life  
(including 4-way edging)

- Corrosion-resistant fixtures
- Use of high-quality and high-strength materials
- Versatile and practical accessories



The movable ladder shoe sets new standards in stability


[Learn more](#)



### clip-step R 13 step padding

Certified non-slip protection for step ladders

- Fulfills the requirements of the highest possible non-slip class R 13 thanks to aluminium oxide particles
- Improves work safety in wet and oil-contaminated environments
- Applied up to the maximum accessible step as a visual check
- Retrofittable, available as a spare part and also in yellow in selected lengths (RAL 1021)



### ergo-pad® grip area

For easier and more ergonomic handling at the optimum carrying point




#### Note: Working heights

- National regulations (e.g. TRBS 2121 Part 2 in Germany) must be complied with with regard to the maximum working height when using the ladder as a workstation.
- Information on [TRBS 2121 Part 2](#) has been summarised on our Service page
- Read our [tips and tricks](#) on how to calculate [working height](#)



#### Certificates

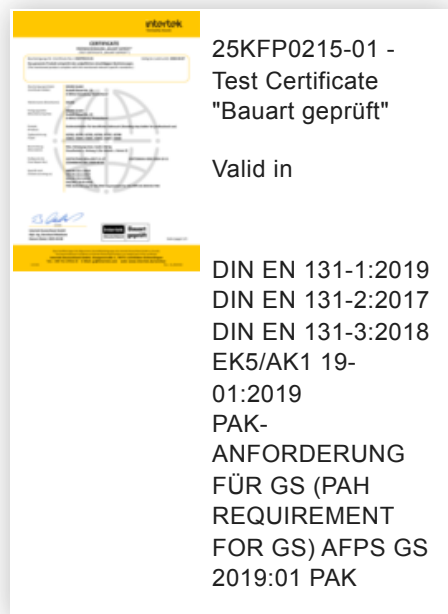

Corporate certifications

Standards for quality and sustainability

