


Order no.: 063279

Wall anchor U-bracket,
adjustable, 550–750 mm,
galvanised steel

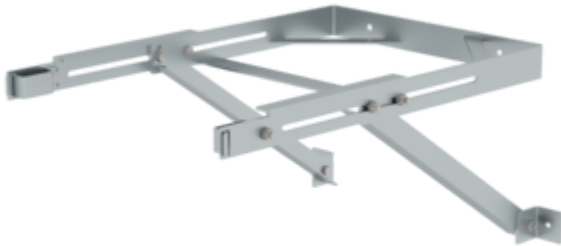

Wall clearance min [mm]

165 200 275 375 **550** 750

Specification

Wall anchor U-bracket	Wall distance min. 550 mm	Wall distance max. 750 mm	Adjustment range 125 mm	Material Galvanised steel
Transport dimensions (plus packaging) 670 x 530 x 70 mm, 8.5 kg	Business division MUNK Günzburger Steigtechnik	Order no. 063279		

Facts

- Ideal for vertical ladders
- Very easy to install thanks to user-friendly design
- Adjustable wall anchor

Scope of supply

- Wall anchor: 1 x

Information on sustainability criteria

- Corporate certification: ISO 9001
- Corporate certification: ISO 14001
- Corporate certification: EN 1090
- Corporate certification: EcoVadis
- RoHS
- REACH
- The MUNK Group complies with a Code of Conduct
- The Supply Chain Act does not apply due to our size
- The materials used are listed in the technical specification
- Resource-saving production: own photovoltaic systems
- Energy-efficient consumption during production: LED lighting
- Repairability, durability and quality: 15-year warranty on series products made in Germany
- Recyclability: Our products are mostly made of aluminium, steel or wood and can be fed directly into the recycling process.
- Socially acceptable working conditions in production: fair wages, gender equality
- Economical and recyclable packaging: no use of polystyrene, predominantly use of wood and cardboard, small amounts of plastic
- No health hazards for the users

More product pictures

Added value

Optimum planning

- Practical planning aids (available as [Downloads](#)) with tips for correct planning of vertical ladder systems
- Planning in close coordination with the client as well as the place and purpose of use
- Joint project planning



Corporate certifications

Standards for quality and sustainability

